



# CVAP® RETHERM OVEN



## RTV5 SERIES RTV5-04UV | RTV5-05UV | RTV5-05UV-ST | RTV5-14UV

CVap Retherm Cabinet: Includes C-Touch Control, HACCP Temperature Downloads, and Convection Cooking.

### SHORT FORM SPECS

Shall Be Winston CVap Retherm Oven, model \_\_\_\_\_. Unit to utilize a C-Touch control with processor, that utilizes calibration-free thermistors to adjust evaporator and air temperatures in 1°F increments. Features must include a minimum of eight programmable channels which are lockable, USB HACCP download for temperature monitoring and convection fan.


### CONFIGURATIONS

**Half-sized:** Easily mobile versions, allowing operator to see over cabinet when transporting. Most half sized units are also stackable for increased versatility. Some versions available for under-counter use with 1" wheels.

**Full-sized:** Provides maximum capacity for high volume operators.

### CVAP ADVANTAGE

The CVap RTV is the fastest cooking CVap Oven currently available. Some call it a "Poor Man's Combi." We don't want to BS you though... it isn't a combi. Yep, it can cook with sous vide precision, or bake, or braise, or roast, or poach, or low-temp steam... AND it does other things a convection oven only dreams about. But, it isn't going to roast 758 chickens in 4 minutes, 33 seconds. It also isn't going to make you refinance your house to buy one or pay for repairs. We've got volumes of science and data to back us up, but only so much space here. If you want to learn more, go to our website, [www.winstonfoodservice.com](http://www.winstonfoodservice.com), and geek out with us.

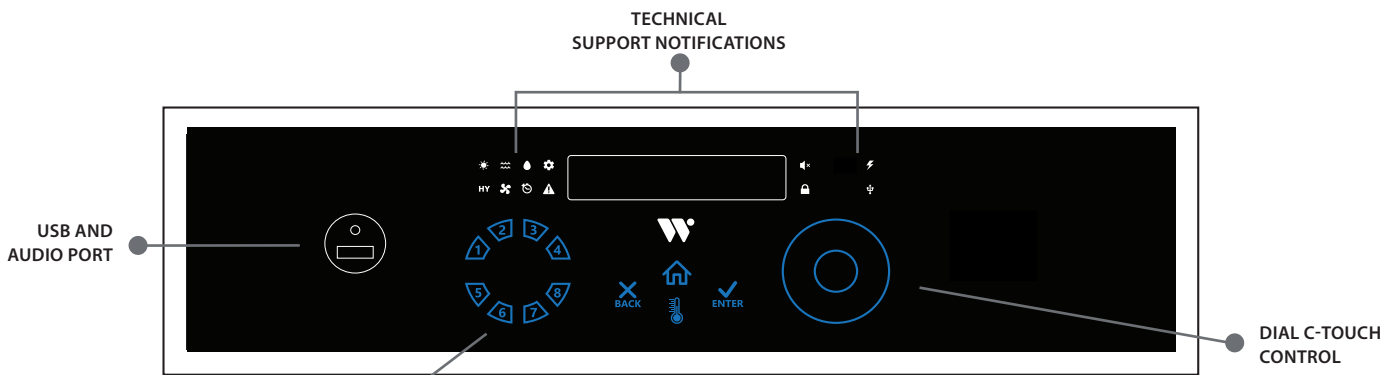

MODEL TYPE	CTC	WC	FP	HD	CM	AP
RTV5	YES	NO	NO	USB	ON COOKING ON HOLDING	YES

CTC - C-Touch Control  
 WC - Wireless Connectivity  
 FP - Food Probe  
 HD - HACCP Temp Download  
 CM - Convection Mode  
 AP - Audio



## Cabinet Specifications

RTV5-04UV | RTV5-05UV | RTV5-05UV-ST | RTV5-14UV

## MODEL NUMBER DESCRIPTIONS

## EQUIPMENT TYPES

HO = HOLDING  
CH = COOK/HOLD  
RT = RETHERM  
UB = UNIVERSAL BIN

## SERIES

R T V 5 - 0 4 U V

EQUIPMENT TYPE

TECHNOLOGY

PAN CAPACITY

## PAN CONFIGURATION

## PAN CONFIGURATIONS

HP = HALF PAN  
SP = SHEET PAN  
UV = UNIVERSAL

MODEL #	CAPACITY*			EXTERIOR DIMENSIONS**			ELECTRICAL					SHIP WEIGHT LBS(KG)	AVAILABLE OPTIONS	
	SHEET PAN (18" x 26")	HALF SHEET PAN (18" x 13")	HOTEL PAN (12" x 20" x 2.5")	HEIGHT IN.(MM)	DEPTH IN.(MM)	WIDTH IN.(MM)	VOLTS	PHASE	WATTS	AMPS	NEMA***			INT'L
RTV5-04UV	4	8	8	35.8(909)	34.5(876)	28(711)	208	1	7212	34.7	6-50P	Call Factory	198(90)	A,B,C,E,F,J,L,M,O,P
							208	3	7212	23.7	15-30P			
							240	1	7212	30	6-50P			
RTV5-05UV	5	10	10	39.3(997)	34.5(876)	28(711)	208	1	7212	34.7	6-50P	Call Factory	250(113)	A,C,E,F,J,M,O,P
							208	3	7212	23.7	15-30P			
							240	1	7212	30	6-50P			
RTV5-05UV-ST (Stacked Pair) ****	10(2 x 5)	20(2 x 10)	20(2 x 10)	76.8(1950)	34.5(876)	28(711)	208	1	7212	34.7	6-50P	Call Factory	500(226)	A,C,E,F,J,M,O,P
							208	3	7212	23.7	15-30P			
							240	1	7212	30	6-50P			
RTV5-14UV	14	28	28	70.8(1857)	34.5(876)	28(711)	208	3	10815	33.7	15-50P	Call Factory	420(190)	A,C,E,F,J,K,M,O,P
							240	1	10815	45	15-50P			

\*Capacity- Determined by 3.5"(89mm) adjustable spacing, with a load limit of 65lb (29.25kg) per rack. | \*\*Exterior Dimensions- Based on use of standard supplied 3" Heavy Duty plate casters. Subtract 2.5" (63.5) for 1" wheels. Add 2"(50.8) for 5" casters, and add 1.75"(63.5) for 6" legs. | \*\*\*NEMA- Supplied with 84" (2134mm) (minimum) power cord and plug. | \*\*\*\* Stacked units require two outlets. Wattage listed is per unit.

**CONTROL:** C-Touch control with vapor and air temperatures to be adjusted in 1°F increments. Processor controlled calibration-free thermistors, accurate within +/- 2°F. Control allows for eight programmable (and lockable) channels, accommodates software updates via USB.

**MATERIALS:** To be commercial and institutional grade stainless steel interior and exterior.

**DOORS:** Insulated field-reversible door with magnetic handles. Full-sized units to include two dutch doors. Doors may be specified with windows, pass-through, or a combination of both.

**WATER FILL:** Includes auto water fill, using a 1/4" National Pipe Thread (NPT). May be used as manual fill, which includes low water detection. Low mineral potable water recommended, otherwise use deionizer/demineralizer to minimize corrosion damage.

**INSTALLATION REQUIREMENTS:** Units to be installed with 2" (51mm) clearance on sides and may not be installed within proximity to anything omitting heat that would allow the exterior of the Winston cabinet to exceed surface temperatures of >200°F. Refer to owner's manual for specific installation requirements. Generally, this equipment is not required to be installed under Type 1 or Type 2 Hoods; however, check local health and fire codes for requirements specific to the location.

**INDUSTRY COMPLIANT:** Equipment complies with domestic and most international requirements; such as UL, C-UL, UL Sanitation, CE, MEA, EPA202, and others.

**WARRANTY:** Limited one-year warranty (excludes gaskets, lamps/lights, hoses, power cord, glass panels, and evaporator). Warranty disclaimer for improper cleaning, installation, and/or maintenance. Ask for complete warranty disclosure.

## SPECIFY THE FOLLOWING WHEN ORDERING:

## Standard (No additional cost):

- Voltage and Phasing Preference:  
208V or 240V, three or single phase.
- Hinge Preference: Left or right hinge.

## Optional (Additional cost):

- |                                |                      |
|--------------------------------|----------------------|
| A. 5" Plate Casters            | I. Transport         |
| B. 1" Wheels                   | J. Locking Handle    |
| C. Window                      | K. Security Package  |
| D. Flip-Up Lexan Door          | L. 4" Legs           |
| E. Pass Through                | M. 6" Legs           |
| F. Pass Through - Window       | N. Auto Water Fill   |
| G. Pass Through - Flip-Up Door | O. Cord Wrap         |
| H. Full Perimeter Bumper       | P. Extended Warranty |

## Accessories &amp; Supplies (Additional cost):

- |          |   |
|----------|---|
| PS2206-4 | Wire rack-chrome (4-pack)                 |
| PS2206-5 | Wire rack-chrome (5-pack)                 |
| PS2938-4 | Wire rack-stainless steel (4-pack)        |
| PS2980-2 | Wire rail (2-pack)                        |
| PS2935-2 | Wire rail - 04HP (2-pack)                 |
| PS2429   | External water filter for auto water fill |
| PS2696   | Mobile water removal system               |
| PS3171   | Leg and shelf kit for 04UV and 05UV       |
| PS3174   | Stacking kit for 04UV and 05UV            |
| PS3167   | Drain kit for stacked pair                |
| PS3173   | Top Extension 8.5"                        |

BUY WINSTON SERVICE PARTS, ACCESSORIES, AND SUPPLIES ONLINE!

Factory direct at [winstonind.com/buyparts](http://winstonind.com/buyparts)